ALPHA PLATFORMS
WE LIFT YOU ABOVE ALL

TRUCK-MOUNTED BOOM LIFT WITH OPERATOR



A-250 250 FT

Our second-tallest lift. 121 ft of side reach for everything from city facades and telecom to refineries and plants.

Ruthmann T243A on a Kenworth T800

ON EVERY JOB

- Certified operator included, all day
- COCKPIT control system limits reach by basket load
- Delivery, fuel and insurance included
- Auto outrigger setting and leveling, set up in about 15 minutes
- Street and sidewalk permits, cones, signs and flaggers handled by us
- 12 ft basket for up to 6 people, tools and materials

BETTER EQUIPMENT | BETTER SAFETY | BETTER SERVICE | BETTER EFFICIENCY


Email: info@alphaplatforms.com
Web: www.alphaplatforms.com/250-foot-boom-lift

CALL NOW: 855-2000-855

ALPHA PLATFORMS
WE LIFT YOU ABOVE ALL

TRUCK-MOUNTED BOOM LIFT WITH OPERATOR

A-250 WORKING RANGE

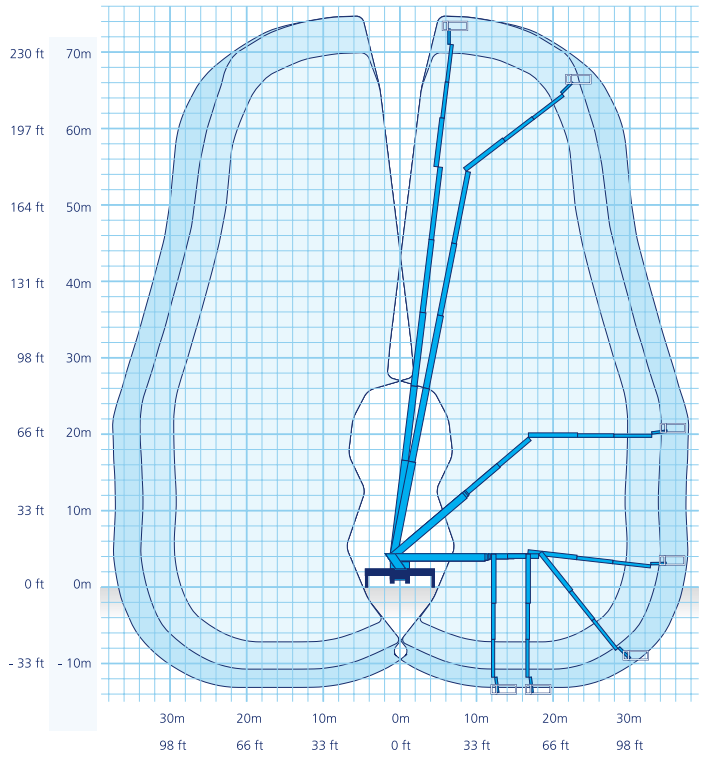

☐ 220 lb basket load ☐ 705 lb basket load ☐ Full basket

Both sides of the truck. From the manufacturer's chart. A guide only: the operator's load chart decides on site.

SPECIFICATIONS

Max. working height	244'11" / 74.6 m
Max. platform height	238'5" / 72.6 m
Max. side reach	121'5" / 37 m
Max. reach below ground	45'11" / 14 m
Upper boom extension	29'5" / 9 m
Turret rotation	250° each way
Outrigger spread, front and rear	8'3" (within truck width) to 29'4" / 2.52 to 8.95 m
Transport dimensions	45'9" × 8'4" × 13'5" / 13.95 × 2.54 × 4.08 m
Gross vehicle weight rating	83,775 lb
Own weight	about 77,000 lb
Max. setup slope	2°
Wind limit	28 mph
Insulated	No

BASKET

Basket capacity	1,322 lb / 600 kg, up to 6 people
Capacity with the upper boom far out	265 lb / 120 kg, 1 person
Basket size	7'9" extending to 12'4" × 3'6" / 2.37 to 3.77 × 1.07 m
Basket rotation	220° each way
Power in the basket	110 V / 24 V DC
Hydraulic tool outlet	2,900 PSI, 2.6 GPM
In the basket	Air line, heater, A/C, lights, rain cover, sunshade, hoist, winch