ALPHA PLATFORMS
WE LIFT YOU ABOVE ALL

TRUCK-MOUNTED BOOM LIFT WITH OPERATOR



A-300 300 FT

The tallest lift we run. German-engineered, 300 ft up and 137 ft out, for jobs nothing else can reach.

Ruthmann T295A on a Kenworth T800

ON EVERY JOB

- Certified operator included, all day
- COCKPIT control system limits reach by basket load
- Delivery, fuel and insurance included
- Auto outrigger setting and leveling, set up in about 15 minutes
- Street and sidewalk permits, cones, signs and flaggers handled by us
- 12 ft basket for up to 6 people, tools and materials

BETTER EQUIPMENT | BETTER SAFETY | BETTER SERVICE | BETTER EFFICIENCY

Email: info@alphaplatforms.com
Web: www.alphaplatforms.com/300-foot-boom-lift


CALL NOW: 855-2000-855

ALPHA PLATFORMS
WE LIFT YOU ABOVE ALL


TRUCK-MOUNTED BOOM LIFT WITH OPERATOR

A-300 WORKING RANGE

SKY MODE

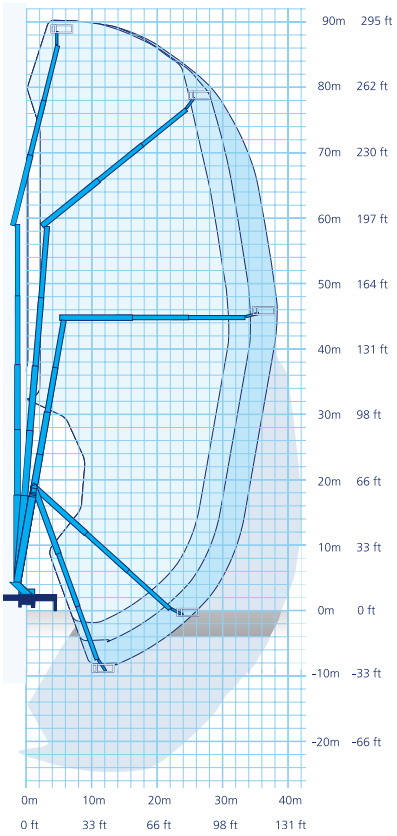

HEIGHT MODE

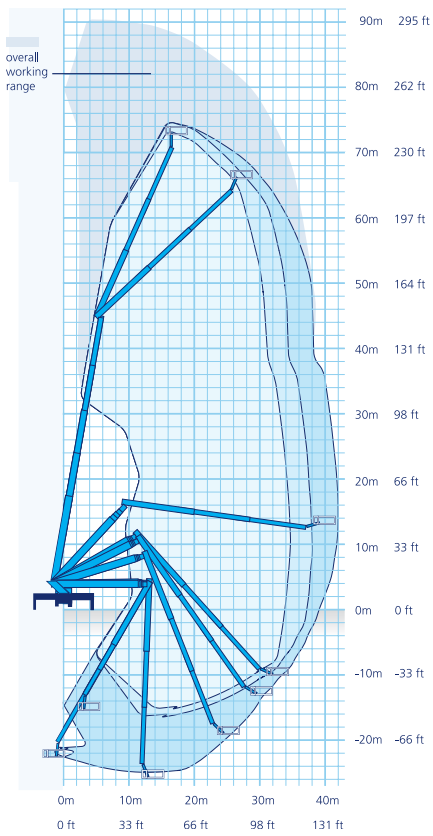

☐ 220 lb basket load ☐ 772 lb basket load ☐ Full basket

Two performance modes: SKY for the most height, HEIGHT for more reach low down. From the manufacturer's chart. A guide only: the operator's load chart decides on site.

SPECIFICATIONS

Max. working height	294 ft / 89.6 m
Max. platform height	287'5" / 87.6 m
Max. side reach	137 ft / 41.8 m
Max. reach below ground	78 ft / 23.7 m
Upper boom extension	54'9" / 16.7 m
Turret rotation	270° each way
Outrigger spread, front and rear	15'6" to 31'6" / 4.73 to 9.61 m
Transport dimensions	49'3" × 8'8" × 13'5" / 14.99 × 2.64 × 4.1 m
Gross vehicle weight rating	126,000 lb
Own weight	about 114,460 lb
Max. setup slope	1°
Wind limit	28 mph
Insulated	No

BASKET

Basket capacity	1,322 lb / 600 kg, up to 6 people
Capacity with the upper boom far out	265 lb / 120 kg, 1 person
Basket size	7'9" extending to 12'4" × 3'6" / 2.37 to 3.77 × 1.07 m
Basket rotation	220° each way
Power in the basket	110 V / 24 V DC
Hydraulic tool outlet	2,900 PSI, 2.6 GPM
In the basket	Air line, heater, A/C, lights, rain cover, sunshade, hoist, winch